

CIRCA TABLE

DESCRIPTION

Circa's revolutionary flat-panel LED light source combines seamless movement with warm and balanced illumination. Through its integrated USB charging port, 45° shade tilt and 360° rotation, Circa redefines the ambient lighting category. Circa is available in a wide range of models to satisfy all residential, office and hospitality applications.

FIXTURE TYPE

Table

LIGHT SOURCE

LED Flat-Panel

PRODUCT CODES

Circa Table Graphite:	CIRC TBL GPT
-----------------------	--------------

Circa Table White:	CIRC TBL WHT
--------------------	--------------

LIGHT CONTROL

Optical Switch (4-stage control. 100%, 50%, 15%, off)


FEATURES

- 360° shade rotation
- 45° shade tilt in two directions
- USB charging port
- Ships flat-packed

SPECIFICATIONS

- Voltage: 120/220V 60Hz
- Power Consumption: 8.5W
- Color temperature: 2700K
- Luminosity: 380 Lumens
- Luminaire efficacy: 45 Lumens/Watt
- Color Rendition Index: 85 CRI
- ADA compliant
- Title 20 compliant
- 50K hour lifespan
- Cord length: 8' (244cm)
- Global multi-plug adapter available
- 1 year warranty

CERTIFICATIONS



PACKAGING WEIGHT AND DIMENSIONS

Circa Table :	8.45LBS 15" X 14" X 4"
	3.8KGS 38cm X 36cm X 10cm

NOTES

Custom requests can be considered on volume orders




FINISHES



DIMENSIONS

CIRCA TABLE

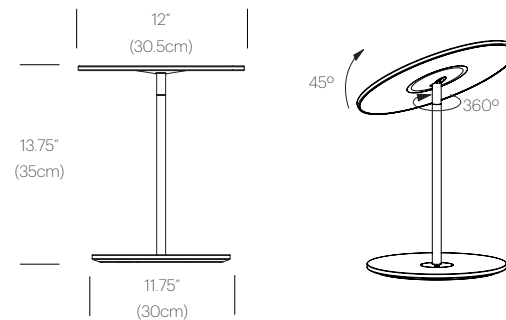

CIRCA FLOOR

DESCRIPTION

Circa's revolutionary flat-panel LED light source combines seamless movement with warm and balanced illumination. Through its integrated USB charging port, 45° shade tilt and 360° rotation, Circa redefines the ambient lighting category. Circa is available in a wide range of models to satisfy all residential, office and hospitality applications.

FIXTURE TYPE

Floor

LIGHT SOURCE

LED Flat-Panel

PRODUCT CODES

Circa Floor (Graphite):	CIRC FLR GPT
Circa Floor (White):	CIRC FLR WHT
Circa Floor+Ped. (Graphite):	CIRC FLR GPT +PEDESTAL
Circa Floor+Ped. (White):	CIRC FLR WHT +PEDESTAL

LIGHT CONTROL

Optical Switch (4-stage control. 100%, 50%, 15%, off)


FEATURES

- 360° shade rotation
- 45° shade tilt in two directions
- USB charging port
- Ships flat-packed

SPECIFICATIONS

- Voltage: 120/220V 60Hz
- Power Consumption: 9.5W
- Color temperature: 2700K
- Luminosity: 435 Lumens
- Luminaire efficacy: 46 Lumens/Watt
- Color Rendition Index: 85 CRI
- ADA compliant
- Title 20 compliant
- 50K hour lifespan
- Cord length: 8' (244cm)
- Global multi-plug adapter available
- 1 year warranty

CERTIFICATIONS



PACKAGING WEIGHT AND DIMENSIONS

Circa Floor:	21.9LBS	29" X 18" X 3.5"
	9.9KGS	74cm X 46cm X 9cm
Circa Floor Pedestal:	2.85LBS	11" X 11" X 3"
	1.3KGS	28cm X 28cm X 8cm

NOTES

Custom requests can be considered on volume orders



FINISHES




WHITE




GRAPHITE

DIMENSIONS

CIRCA FLOOR

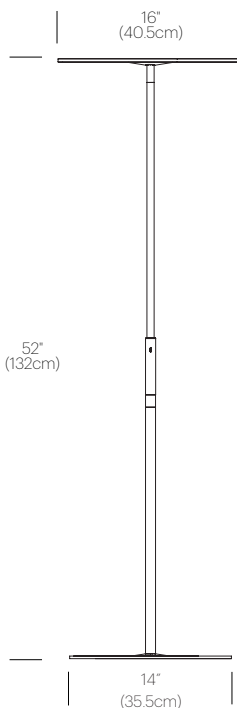

CIRCA FLOOR+PEDESTAL

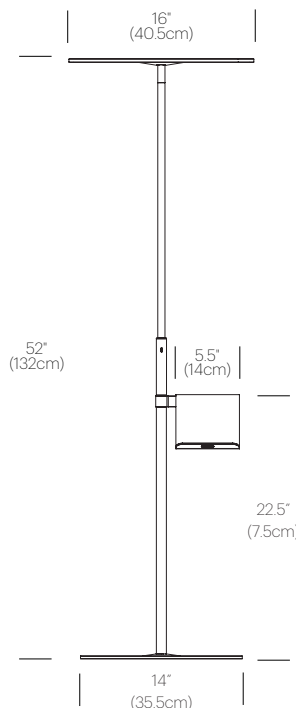

CIRCA WALL

DESCRIPTION

Circa's revolutionary flat-panel LED light source combines seamless movement with warm and balanced illumination. Through its integrated USB charging port, 45° shade tilt and 360° rotation, Circa redefines the ambient lighting category. Circa is available in a wide range of models to satisfy all residential, office and hospitality applications.

FIXTURE TYPE

Wall

LIGHT SOURCE

LED Flat-Panel

PRODUCT CODES

Circa Wall 12 Graphite:	CIRC WAL 12 GPT
Circa Wall 12 White:	CIRC WAL 12 WHT
Circa Wall 16 Graphite:	CIRC WAL 16 GPT
Circa Wall 16 White:	CIRC WAL 16 WHT

LIGHT CONTROL

Optical Switch (4-stage control. 100%, 50%, 15%, off)


FEATURES

360° shade rotation
45° shade tilt in two directions
USB charging port
Ships flat-packed

SPECIFICATIONS

Voltage: 120/220V 60Hz
Power Consumption: 8.5W
Color temperature: 2700K
Luminosity: 380 Lumens
Luminaire efficacy: 45 Lumens/Watt
Color Rendition Index: 85 CRI
ADA compliant
Title 20 compliant
50K hour lifespan
Cord length: 8' (244cm) (Field Cuttable)
Global multi-plug adapter available
1 year warranty

CERTIFICATIONS



PACKAGING WEIGHT AND DIMENSIONS

Circa Wall 12:	5.75LBS	15" X 14" X 4"
	2.6KGS	38cm X 36cm X 10cm
Circa Wall 16 :	9.05LBS	18.5" X 18" X 4"
	4.1KGS	47cm X 46cm X 10cm

NOTES

Custom requests can be considered on volume orders




FINISHES




DIMENSIONS

CIRCA WALL 12



CIRCA WALL 16



CIRCA PENDANT

DESCRIPTION

Circa's revolutionary flat-panel LED light source combines seamless movement with warm and balanced illumination. Through its 45° shade tilt and 360° rotation, Circa redefines the ambient lighting category. Circa is available in a wide range of models to satisfy all residential, office and hospitality applications.

FIXTURE TYPE

Pendant

LIGHT SOURCE

LED Flat-Panel

PRODUCT CODES

Circa Pendant 12 Graphite:	CIRC PND 12 GPT
Circa Pendant 12 White:	CIRC PND 12 WHT
Circa Pendant 16 Graphite:	CIRC PND 16 GPT
Circa Pendant 16 White:	CIRC PND 16 WHT

LIGHT CONTROL

Hard wired (Triac transformer)
ELV dimmer recommended


FEATURES

360° shade rotation
45° shade tilt in two directions
Ships flat-packed

SPECIFICATIONS

Voltage: 120/220V 60Hz
Power Consumption: 11.5W
Color temperature: 2700K
Luminosity: 522 Lumens
Luminaire efficacy: 45 Lumens/Watt
Color Rendition Index: 85 CRI
Title 20 compliant
50K hour lifespan
Cord length: 10' (305cm) (Field Cuttable)
1 year warranty

CERTIFICATIONS



PACKAGING WEIGHT AND DIMENSIONS

Circa Pendant 12:	5.75LBS	15" X 14" X 4"
	2.6KGS	38cm X 36cm X 10cm
Circa Pendant 16 :	9.05LBS	18.5" X 18" X 4"
	4.1KGS	47cm X 46cm X 10cm

NOTES

Custom requests can be considered on volume orders



FINISHES




WHITE




GRAPHITE

DIMENSIONS

CIRCA PENDANT 12

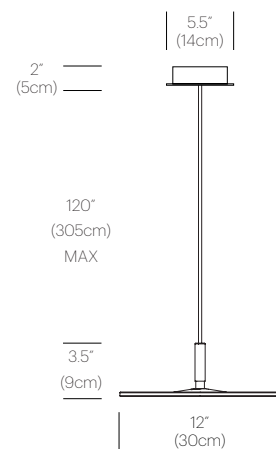

CIRCA PENDANT 16

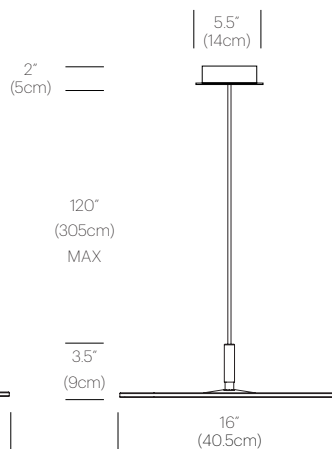

CIRCA FLUSH

DESCRIPTION

Circa's revolutionary flat-panel LED light source combines seamless movement with warm and balanced illumination. Through its integrated USB charging port, 45° shade tilt and 360° rotation, Circa redefines the ambient lighting category. Circa is available in a wide range of models to satisfy all residential, office and hospitality applications.

FIXTURE TYPE

Wall/Ceiling

LIGHT SOURCE

LED Flat-Panel

PRODUCT CODES

Circa Flush Direct 12 Graphite:	CIRC FSH 12 GPT
Circa Flush Direct 12 White:	CIRC FSH 12 WHT
Circa Flush Direct 16 Graphite:	CIRC FSH 16 GPT
Circa Flush Direct 16 White:	CIRC FSH 16 WHT
Circa Flush Indirect 12 Graphite:	CIRC FSH 12 GPT
Circa Flush Indirect 12 White:	CIRC FSH 12 WHT
Circa Flush Indirect 16 Graphite:	CIRC FSH 16 GPT
Circa Flush Indirect 16 White:	CIRC FSH 16 WHT

LIGHT CONTROL

Hard Wired


FEATURES

Ships flat-packed

SPECIFICATIONS

Voltage: 120/220V 60Hz
Power Consumption: 8.5W
Color temperature: 2700K
Luminosity: 380 Lumens
Luminaire efficacy: 45 Lumens/Watt
Color Rendition Index: 85 CRI
Title 20 compliant
50K hour lifespan
1 year warranty

CERTIFICATIONS




PACKAGING WEIGHT AND DIMENSIONS

Circa Flush 12:	5.75LBS	15" X 14" X 4"
	2.6KGS	38cm X 36cm X 10cm
Circa Flush 16 :	9.05LBS	18.5" X 18" X 4"
	4.1KGS	47cm X 46cm X 10cm

NOTES

Custom requests can be considered on volume orders

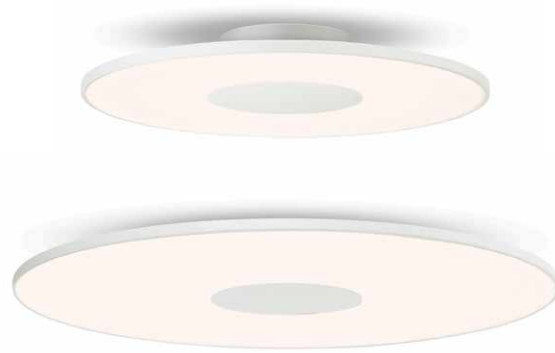

FINISHES





WHITE





GRAPHITE

DIMENSIONS

CIRCA FLUSH 12

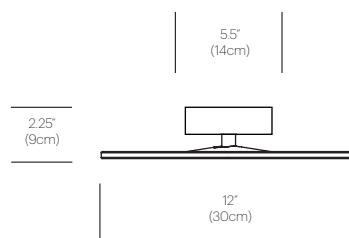

CIRCA FLUSH 16

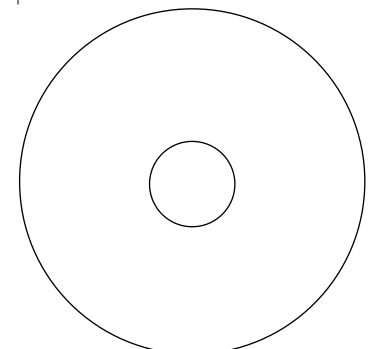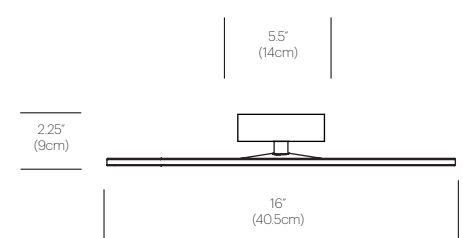

CIRCA CHANDELIER

DESCRIPTION

Circa's revolutionary flat-panel LED light source combines seamless movement with warm and balanced illumination. Through its 45° shade tilt and 360° rotation, Circa redefines the ambient lighting category. Circa Chandelier is available in 3, 5, and 7 lamp configurations to fit a wide range of commercial and residential environments.

FIXTURE TYPE

Pendant

LIGHT SOURCE

LED Flat-Panel

PRODUCT CODES

Circa Pendant 12 Graphite:	CIRC PND 12 GPT
Circa Pendant 12 White:	CIRC PND 12 WHT
Circa Pendant 16 Graphite:	CIRC PND 16 GPT
Circa Pendant 16 White:	CIRC PND 16 WHT
17" Chandelier Canopy:	CHND CAN 17
26" Chandelier Canopy:	CHND CAN 26

LIGHT CONTROL

Hard wired (Triac transformer)
ELV dimmer recommended

FEATURES

360° shade rotation
45° shade tilt in two directions
Ships flat-packed

SPECIFICATIONS

Voltage: 120/220V 60Hz
Power Consumption: 11.5W per lamp
Color temperature: 2700K
Luminosity: 522 Lumens per lamp
Luminaire efficacy: 45 Lumens/Watt
Color Rendition Index: 85 CRI
Title 20 compliant
50K hour lifespan
Cord length: 10' (305cm) (Field Cuttable)
1 year warranty

CERTIFICATIONS



PACKAGING WEIGHT AND DIMENSIONS

Circa Pendant 12:	5.75LBS	15" X 14" X 4"
	2.6KGS	38cm X 36cm X 10cm
Circa Pendant 16 :	9.05LBS	18.5" X 18" X 4"
	4.1KGS	47cm X 46cm X 10cm
Chandelier canopy 17":	15LBS	22" X 22" X 6"
	6.8KGS	56cm X 56cm X 15cm
Chandelier canopy 26":	30LBS	32" X 32" X 6"
	13.6KGS	81cm X 81cm X 15cm

NOTES

Custom requests can be considered on volume orders



FINISHES



WHITE




GRAPHITE




WHITE

DIMENSIONS


CIRCA CHANDELIER 3 (12")

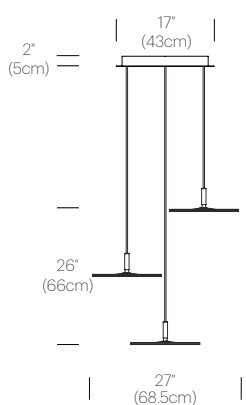


CIRCA CHANDELIER 5 (12")

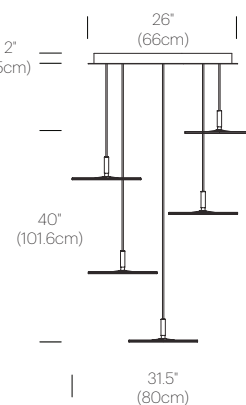


CIRCA CHANDELIER 7 (12")

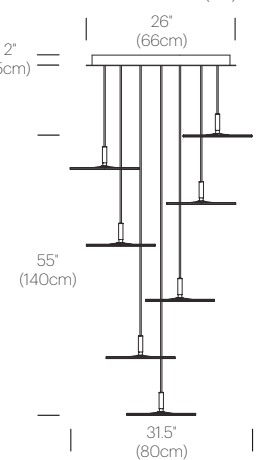


CIRCA CHANDELIER 3 (16")

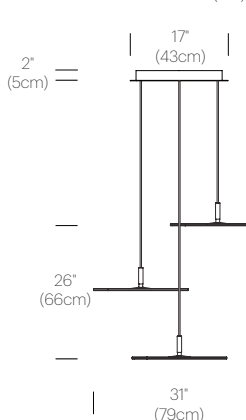


CIRCA CHANDELIER 5 (16")

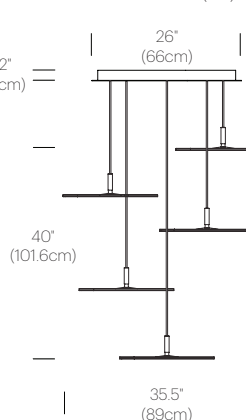

CIRCA CHANDELIER 5 (16")

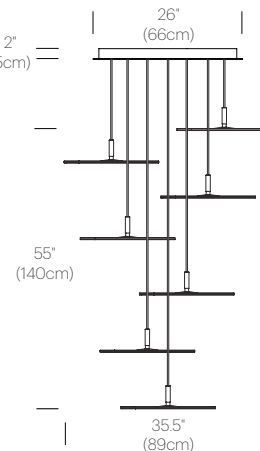

CHANDELIER CANOPY 17"



CHANDELIER CANOPY 26"

